

# **ZOCON: HIGH-QUALITY FROM THE NETHERLANDS**





ZOCON wants to improve and simplify working in agriculture around the world by developing and producing innovative and high-quality machines.

With an efficient and modern factory, we develop, produce and sell our robust, galvanized and modular machines, which are made for the modern farmer, gardener and municipality.





Our welding robots are welding very efficiently our BASIC, ISOBUS and TOPCON Seeders for our own Zocon machines, but also for every (tillage) machine worldwide!

Quality and reliability of our products are extremely important to us, our dealers and our OEM customers and therefore our machines meet the highest standards!



# MAIN FEATURES OF OUR SEEDERS

# **Completely galvanized framework**

Heavy and entirely galvanized frame and high quality parts, so the quality remains good for a long time.

# Many different outputs possible (4-13)

Quick-Change system for the different outputs, to switch easily and without tools between the 10 different ouputs.

# Many different rotors for fine-coarse seeds

The specially developed seed rotors can distribute fine and coarse seeds in larger but also small quantities very accurate and proportionally.

# **Integrated collector for calibration test**

An integrated galvanized collector with an automatic timer (30sec or 60sec) allows a quick and accurate calibration test.

# **Quick-Change Plate**

It's easy now the use same seeder for several machines. Our seeder can be quickly removed from the mounting plate and transferred to another machine without tools.

# **Strong driven Twin Blower**

Strong driven Twin Blower for distribution fine seeds up to an 9m working width machine.

# **Unique relation between quality-price**

Similar machines are many times more expensive.

# Fast delivery time

Seeders are our bestselling machine, so we always have them available from stock.






# 3 DIFFERENT SIZES: Z150, Z300, Z450



# **DIMENSIONS OF THE SEEDERS:**

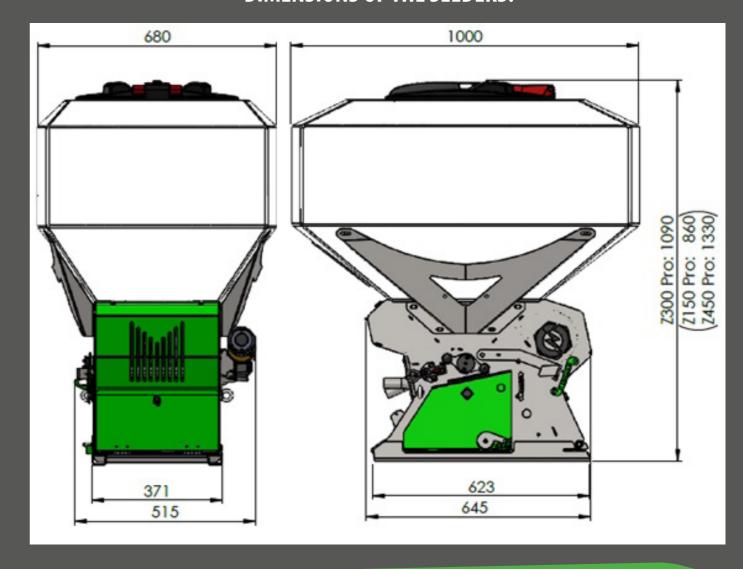

# **DIFFERENT CONTROL OPTIONS: BASIC CONTROL BOX**

# **DIFFERENT CONTROL OPTIONS: ISOBUS / TOPCON**



"Basic" control box with memory removable and moisture resistant with 5m cable (sprepared for optional signal cables/sensors) 24 positions for sowing rate and setting of faster or slower air displacement







### **DIFFERENT SENSORS:**

- Speed Sensor: save your driving speed to let the seeder dosing according driving speed
  - Linkage sensor: seeder will stop automatically when you lift your machine
  - 7pin signal cable: dosing according driving speed and linkage sensor (if right connection and software is available on the tractor)







- Simple visible operation via main screen tractor or Topcon control box
   Memory for 5 tractors, 20 seed types, 20 jobs
  - Memory of carried out work (area worked, kg of seeds)
    - Speed measurement on seed rotor
      - Tanksensor (empty detection)












# 







# **MANY DIFFERENT OUTPUTS POSSIBLE (4-13)**



Quick-Change system for the different outputs, to switch easily and without tools between the 10 different ouputs.













**RAPE** 




















# MANY DIFFERENT ROTORS POSSIBLE

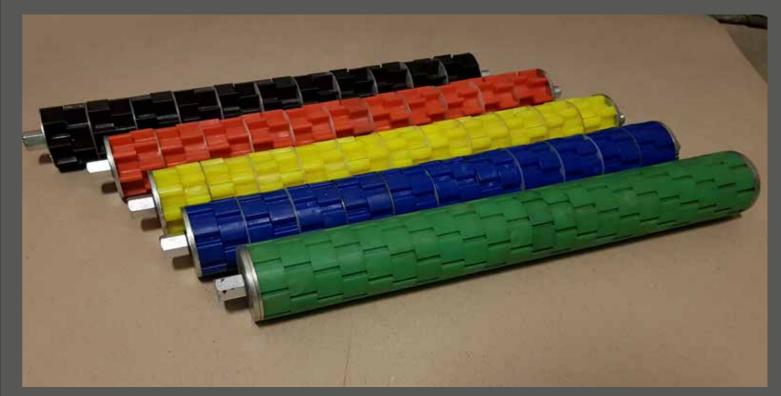








The specially developed seed rotors can distribute fine - coarse seeds in larger but also small quantities very accurate and proportionally. Standard with quick-change system to switch rotors easily and without tools.















**PHACELIA** 



Ø 2,50

Ø 4,00






< 15 >





**5 DIFFERENT BASIC ROTORS POSSIBLE** 











5-stage adjustment rubber seal to distribute fine - coarse seeds in larger but also small quantities very accurate and proportionally.











GRASS













# **ALSO POSSIBLE: CUSTOMER MADE ROTORS**


















# TS FERD.







# **INTEGRATED COLLECTOR FOR CALIBRATION TEST**











An integrated galvanized collector with an automatic timer (30sec or 60sec) allows a quick and accurate calibration test.















# **QUICK CHANGE PLATE**

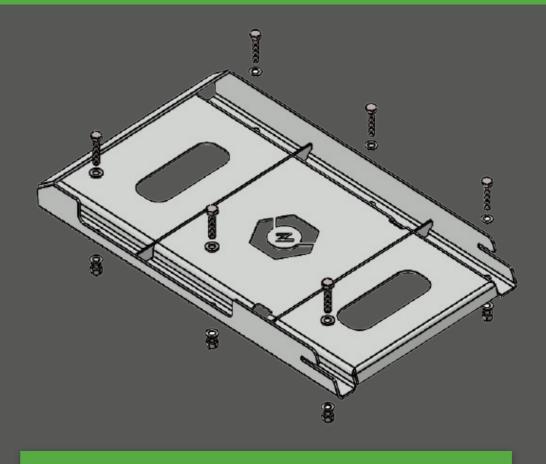








It's easy now the use same seeder for several machines.
Our seeder can be quickly removed from the mounting plate and transferred to another machine without tools.



















# **PROFESSIONAL DISPERSION PLATES**



The professional dispersion plates provide a nice distribution over the complete working width. Standard with a tube of diameter 30. There are various mounting options.

















# **GALVANIZED FRAME & STRONG TWIN BLOWER**



**COMPLETE GALVANIZED FRAME** The seeder consists of high-quality components and a complete galvanized frame




**STRONG DRIVEN TWIN BLOWER** Strong driven Twin Blower for distribution fine seeds up to an 9m working width machine.





TRANSPARENT TANK, HINGED LID Our seeder has a white an transparent plastic hopper for level indication and a hinged lid



















# **EXTRA CABLES FOR OUR SEEDERS**





# More information, video's or photo's about our seeders you can find on our website:



www.zocon.eu